



CURFLO

SELF-PRIMING PUMPS

- Complete pumps & rotating assemblies available
- Constructed in DI material
- Available in 2"(T), 3"(ST), 4"(ST) and 6" (ST)
- ST rotating assemblies are compatible with T casings and cover plates
- ST design allows for impeller clearance adjustments from the cover plate assembly
- ST complete pumps are dimensionally identical to T pumps for easy replacement installation



1113 Howard Ave, Houston, TX 77536

281.479.5000 | Sales@CURFLO.com | www.CURFLO.com



CURFLO

2" T DATA AND CURVE


2" Pump Data

- Net Weight - **205 LBS**
- Impeller Diameter - **6-1/4"**
- R.P.M. - **From 1150rpm To 2,900rpm**
- Max Solids - **1-3/4"**

Self-Priming Data

1,150 RPM (24ft)	-	1,450 RPM (25ft)
1,750 RPM (25ft)	-	2,050 RPM (25ft)
2,350 RPM (25ft)	-	2,650 RPM (25ft)
2,650 RPM (25ft)	-	2,900 RPM (25ft)


PERFORMANCE CURVE 2"x2"

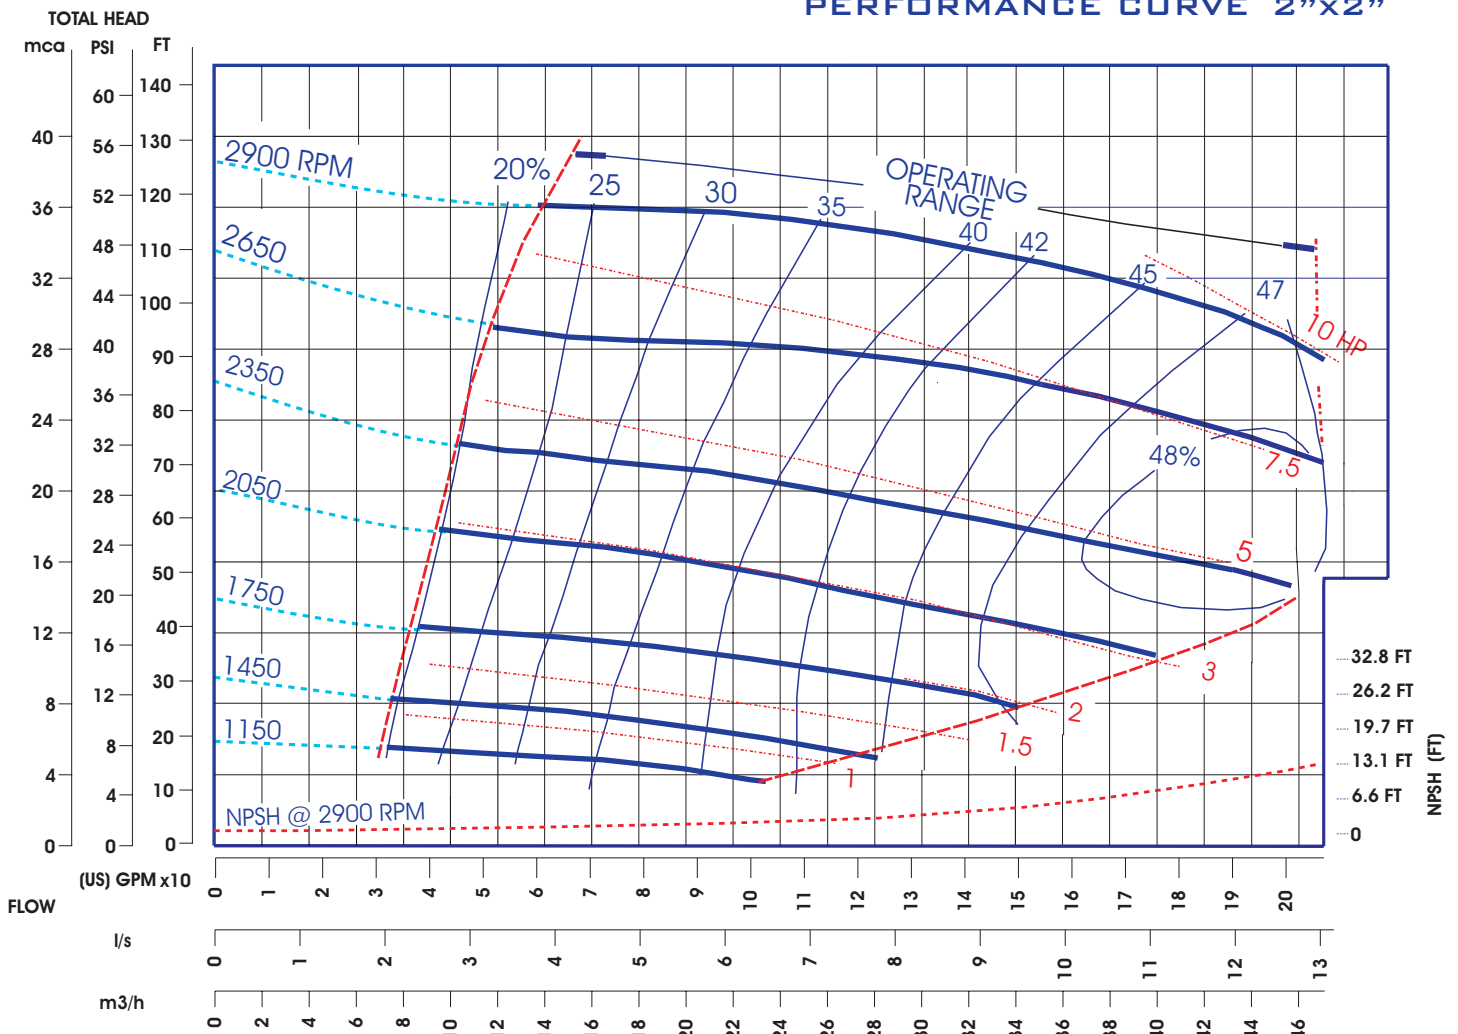



CURFLO

2" T GA INFORMATION

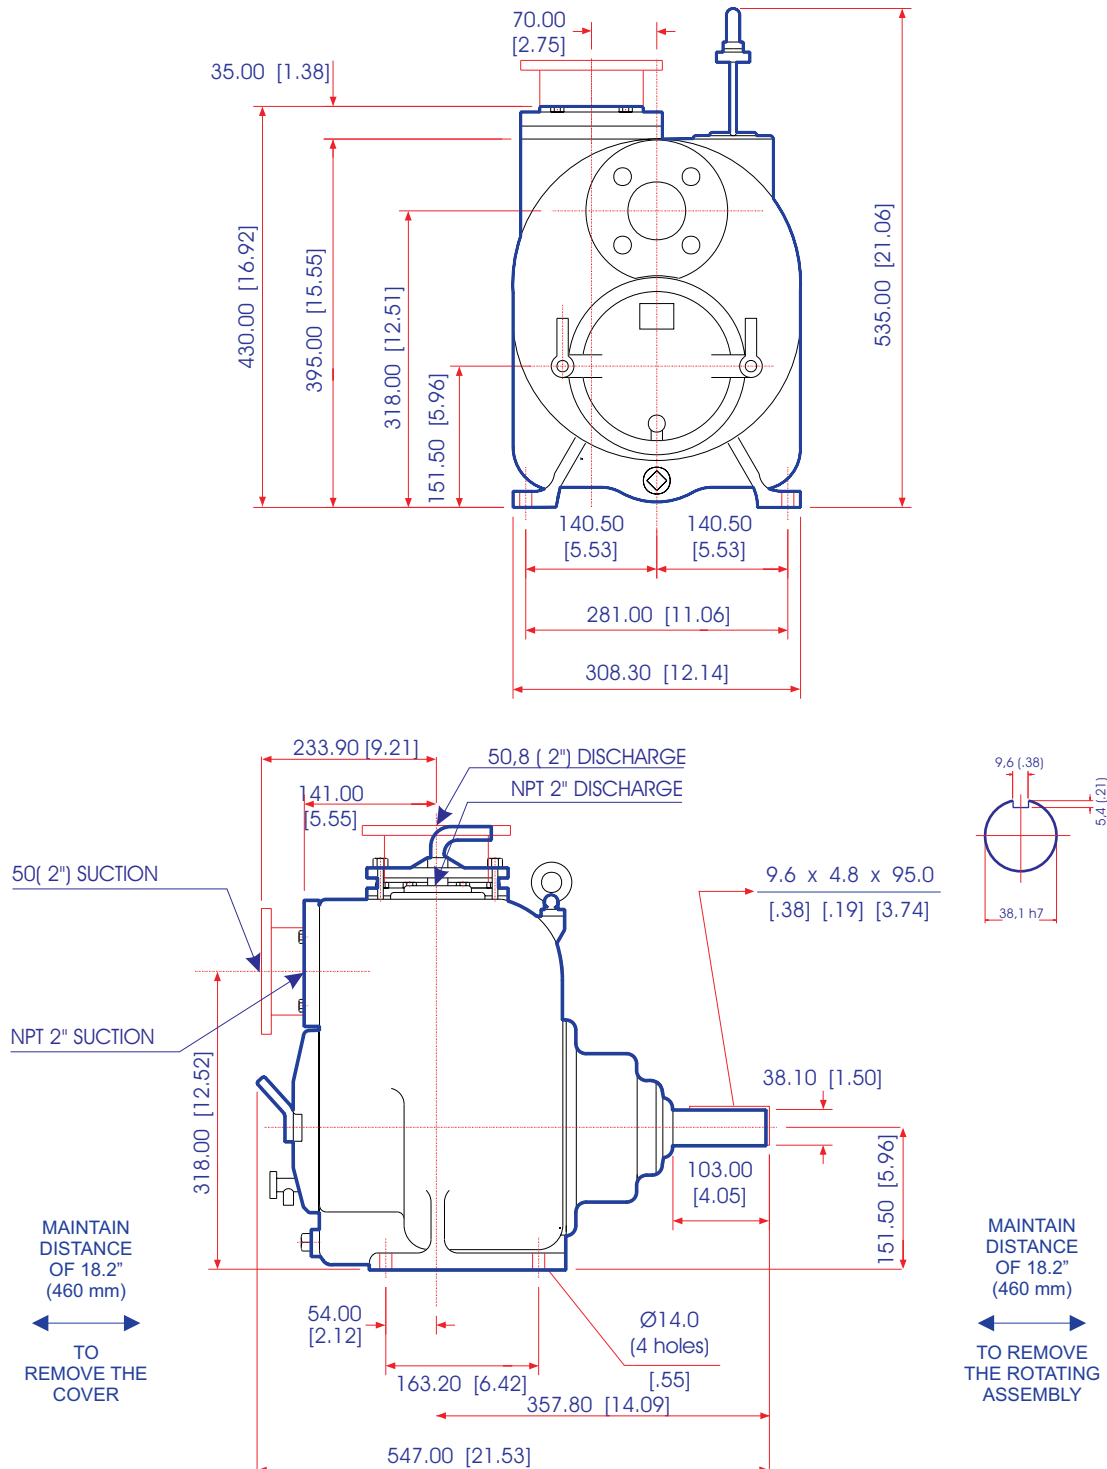



CURFLO


3" ST & T DATA AND CURVE


3" Pump Data

- Net Weight - **400 LBS**
- Impeller Diameter - **8-3/4"**
- R.P.M. - **From 650rpm To 2,150rpm**
- Max Solids - **2-1/2"**

Self-Priming Data

650 RPM (5ft)	-	750 RPM (6ft)
850 RPM (8ft)	-	950 RPM (10ft)
1,050 RPM (13ft)	-	1,150 RPM (16ft)
1,250 RPM (18ft)	-	1,350 RPM (19ft)
1,450 RPM (21ft)	-	1,550 RPM (21ft)
1,650 RPM (22ft)	-	1,750 RPM (22ft)
1,850 RPM (25ft)	-	1,950 RPM (25ft)
2,050 RPM (25ft)	-	2,150 RPM (25ft)

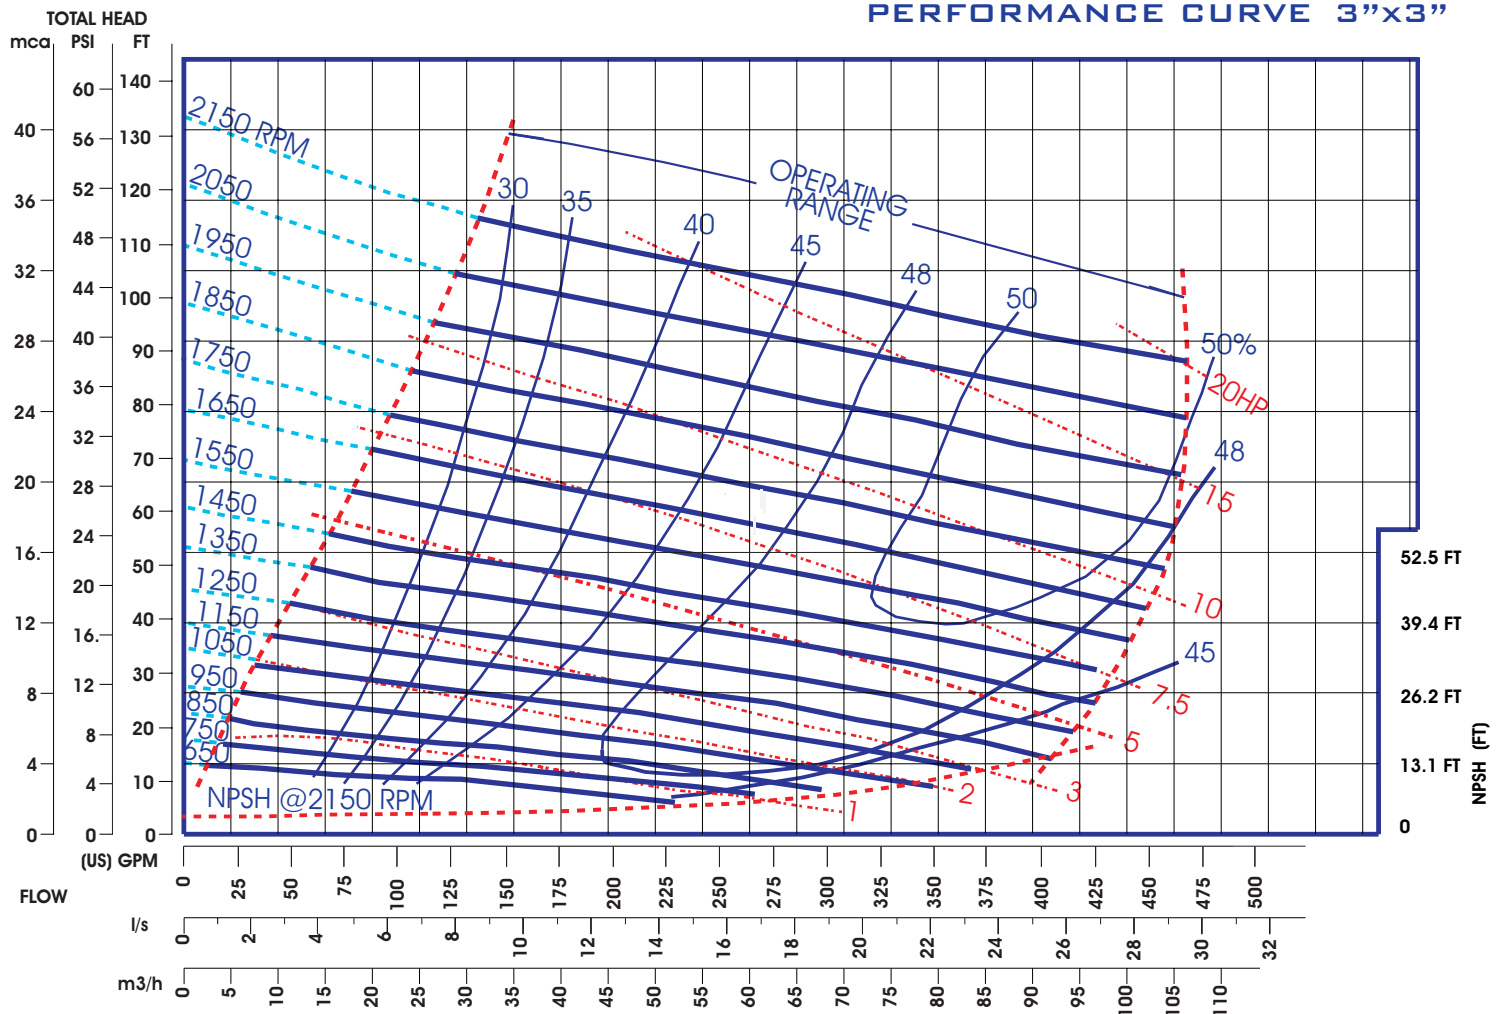

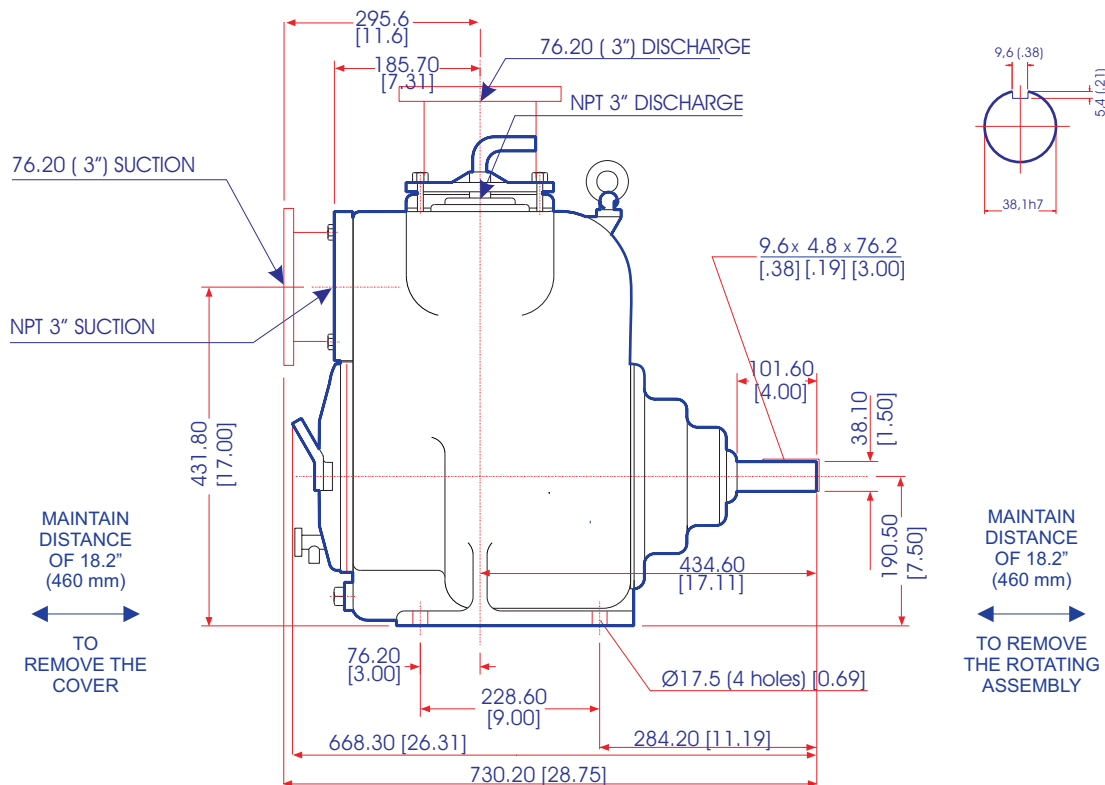[illegible]



CURFLO


4" ST & T DATA AND CURVE


4" Pump Data

- Net Weight - **600 LBS**
- Impeller Diameter - **9-3/4"**
- R.P.M. - **From 650rpm To 1,950rpm**
- Max Solids - **3"**

Self-Priming Data

650 RPM (5ft)	-	750 RPM (8ft)
850 RPM (16ft)	-	950 RPM (19ft)
1,050 RPM (22ft)	-	1,150 RPM (24ft)
1,250 RPM (25ft)	-	1,350 RPM (25ft)
1,450 RPM (25ft)	-	1,550 RPM (25ft)
1,650 RPM (25ft)	-	1,750 RPM (25ft)
1,850 RPM (25ft)	-	1,950 RPM (25ft)

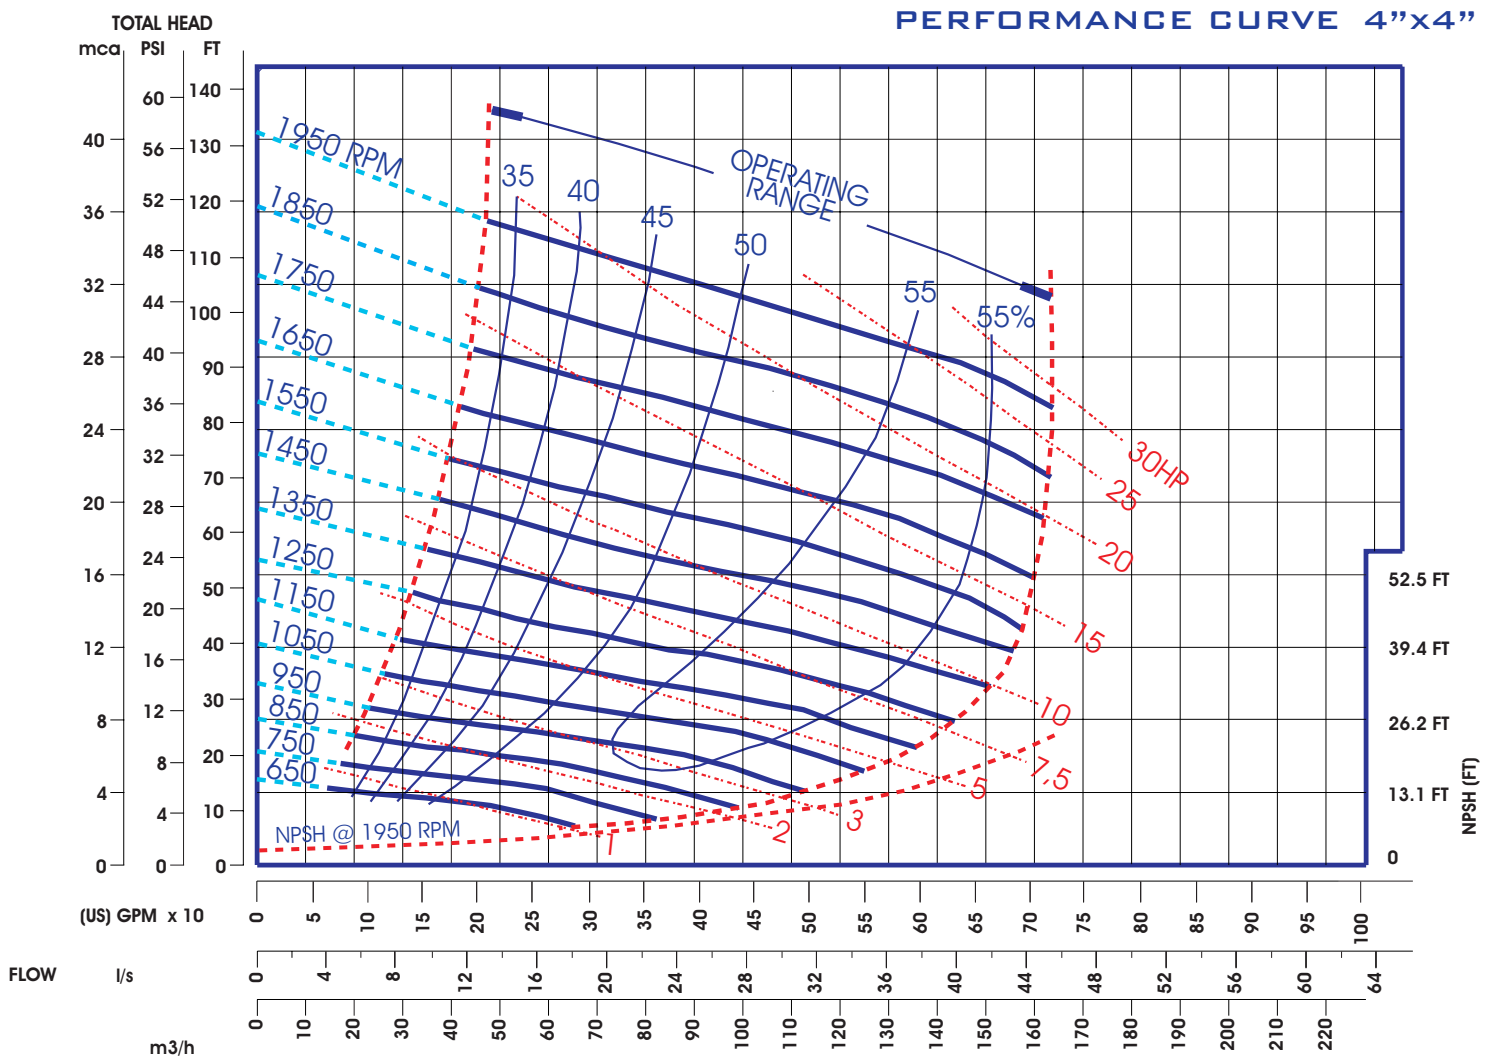

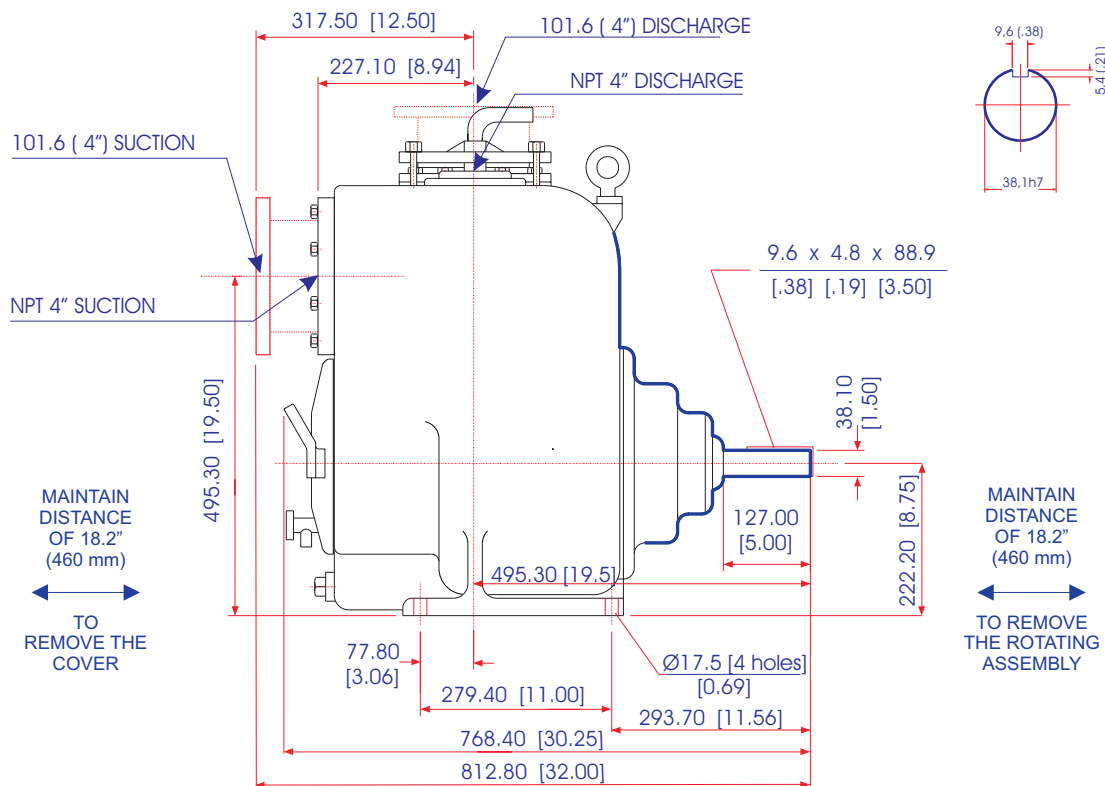[illegible]



CURFLO


6" ST & T DATA AND CURVE

6" Pump Data

- Net Weight - **800 LBS**
- Impeller Diameter - **12-3/8"**
- R.P.M. - **From 650rpm To 1,550rpm**
- Max Solids - **3"**
- CURFLO 6" Pumps Are Supplied
With T Casing/Plate Assembly And ST
Rotating Assembly

Self-Priming Data

650 RPM (8ft)	-	750 RPM (9ft)
850 RPM (12ft)	-	950 RPM (14ft)
1,050 RPM (18ft)	-	1,150 RPM (21ft)
1,250 RPM (25ft)	-	1,350 RPM (22ft)
1,450 RPM (23ft)	-	1,550 RPM (25ft)

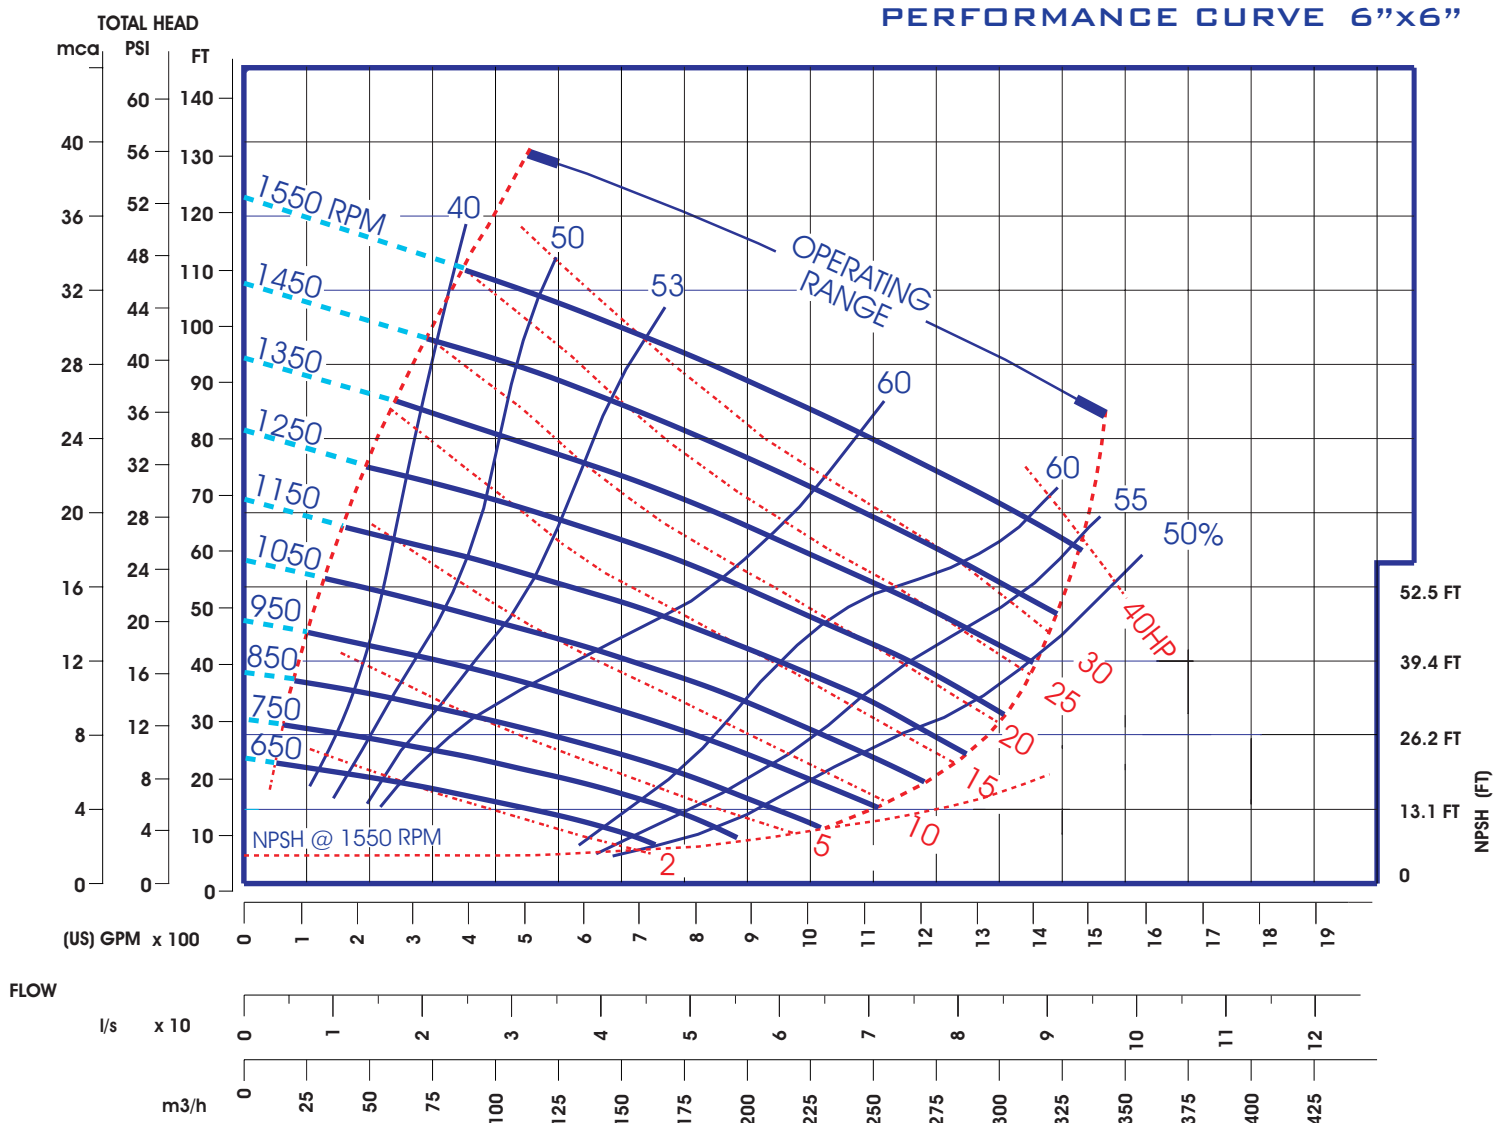



CURFLO

6" ST & T GA INFORMATION

